

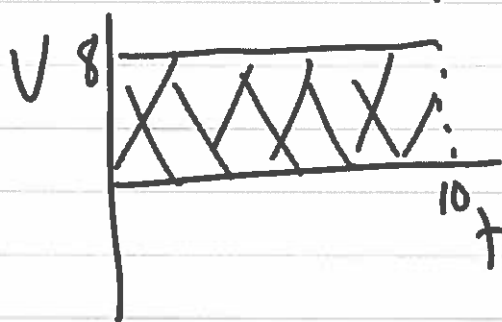
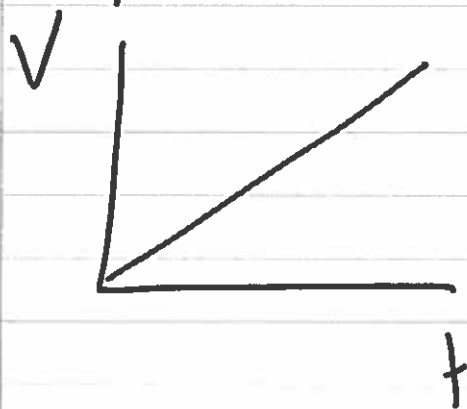
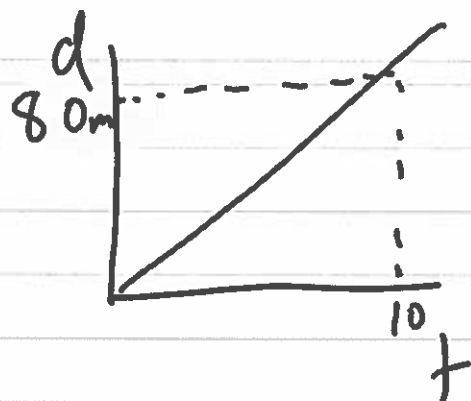
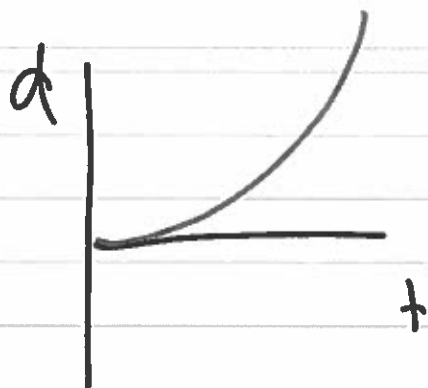


w

①

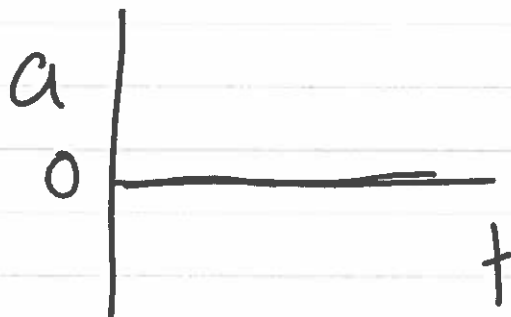

$$\begin{aligned} \text{Area} &= l \times w \\ &= 8 \times 10 \\ &= 80 \text{ m} \end{aligned}$$

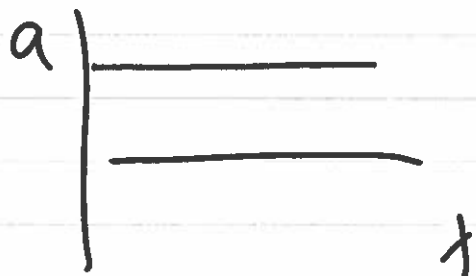

②

$$V = 220 \text{ km/h} \div 3.6 = 61.1 \text{ m/s}$$

$$V_0 = 0$$

$$a = 6.0 \text{ m/s}^2$$

$$d = ?$$

t

$$a.) \quad V^2 = V_0^2 + 2ad$$

$$d = \frac{V^2 - V_0^2}{2a}$$

$$= \frac{(61.1)^2 - (0)^2}{2(6)}$$

$$= \boxed{310 \text{ m}}$$


b.)

$$V = V_0 + at$$

$$t = \frac{V - V_0}{a} = \frac{61.1 - 0}{6.0} = \boxed{10.2 \text{ s}}$$

$$t_{\frac{1}{2}}$$

3.)  $V = 0$   
 $V_0 = 18 \text{ m/s}$   
 $a = -9.80 \text{ m/s}^2$   
 $d =$   
 $t_{\frac{1}{2}} =$

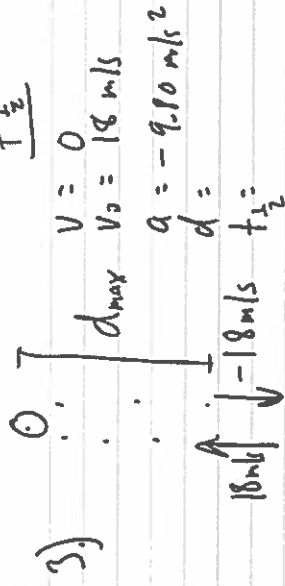

a.)  $V = V_0 + at_{\frac{1}{2}} \quad t_{\frac{1}{2}} = \frac{V - V_0}{a} = \frac{0 - 18 \text{ m/s}}{-9.80 \text{ m/s}^2}$

$$= 1.836 \text{ s}$$

$$t_{\text{total}} = 2(t_{\frac{1}{2}}) = \boxed{3.7 \text{ s}}$$

b.)  $V^2 = V_0^2 + 2ad \quad d = \frac{V^2 - V_0^2}{2a} = \frac{0^2 - (18)^2}{2(-9.80)}$

$$= \boxed{17 \text{ m}}$$

c.)  $V = ?$

$$V_0 = 18 \text{ m/s}$$

$$a = -9.80 \text{ m/s}^2$$

$$d = 12 \text{ m}$$

$$t =$$

$$V^2 = V_0^2 + 2ad$$

$$V = \pm \sqrt{V_0^2 + 2ad} = \pm \sqrt{(18)^2 + 2(-9.80)(12)}$$

$$= \pm 9.42 \text{ m/s}$$

$$V = +9.42 \text{ m/s}$$

$$V_0 = 18 \text{ m/s}$$

$$a = -9.80 \text{ m/s}^2$$

$$t = ?$$

$$V = -9.42 \text{ m/s}$$

$$V_0 = 18 \text{ m/s}$$

$$a = -9.80 \text{ m/s}^2$$



$$V = V_0 + at$$

$$t = \frac{V - V_0}{a}$$

$$= \frac{-9.42 - 18}{-9.80}$$

$$= \frac{9.42 - 18}{-9.80} = \boxed{0.88 \text{ s}}$$

$$= \frac{-9.42 - 18}{-9.80} = \boxed{2.80 \text{ s}}$$

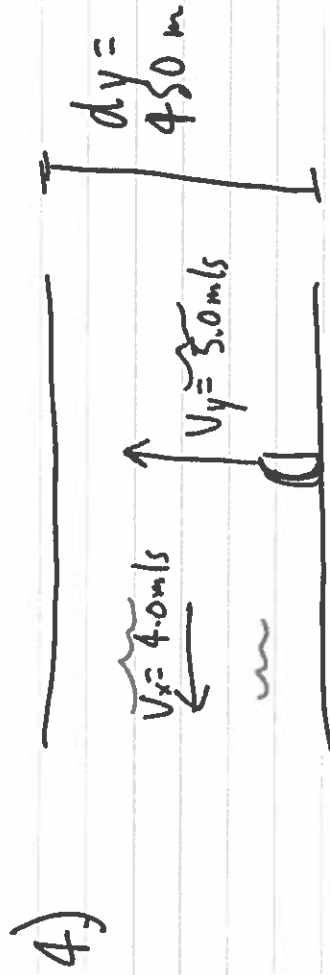

a.  $V_y = \frac{dy}{t}$      $t = \frac{dy}{V_y} = \frac{450 \text{ m}}{3.0 \text{ m/s}} = \boxed{90.0 \text{ s}}$

b.


$$V_r^2 = V_x^2 + V_y^2$$

$$V_r = \sqrt{4.0^2 + 3.0^2} = 5.0 \text{ m/s}$$

$$= \underline{5.0 \text{ m/s}}$$

$$\tan \theta = \frac{V_x}{V_y} \quad \theta = \tan^{-1}\left(\frac{4.0}{3.0}\right)$$

$$= 39^\circ \text{ W of N}$$


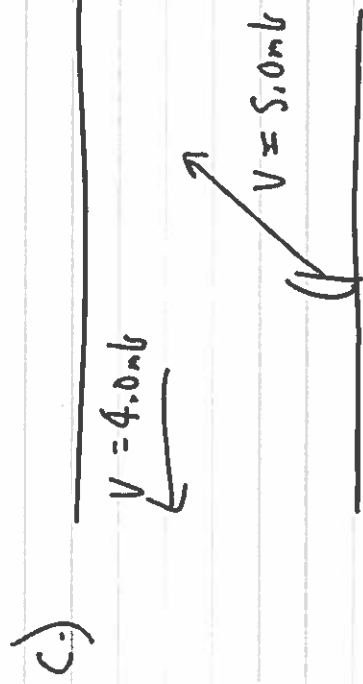


$$\sin \theta = \frac{4.0}{5.0}$$

$$\theta = \sin^{-1}\left(\frac{4.0}{5.0}\right)$$

$$= 53^\circ \text{ E of N}$$

5.)

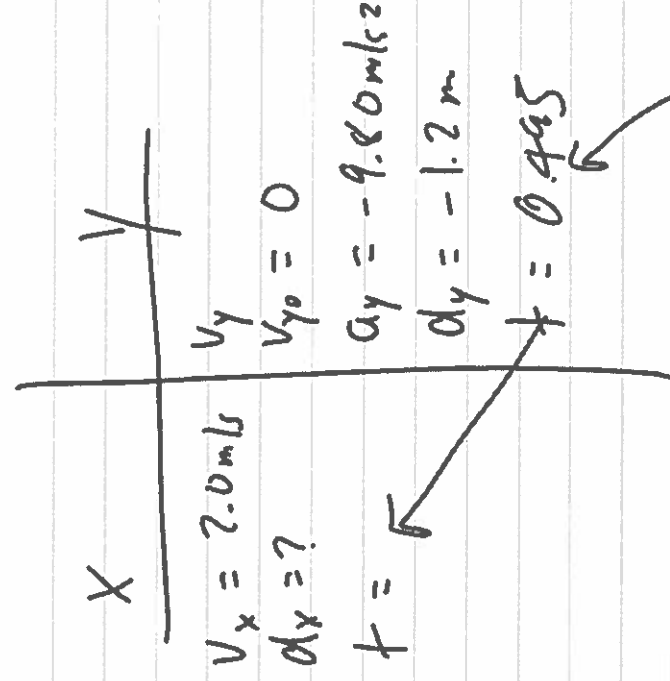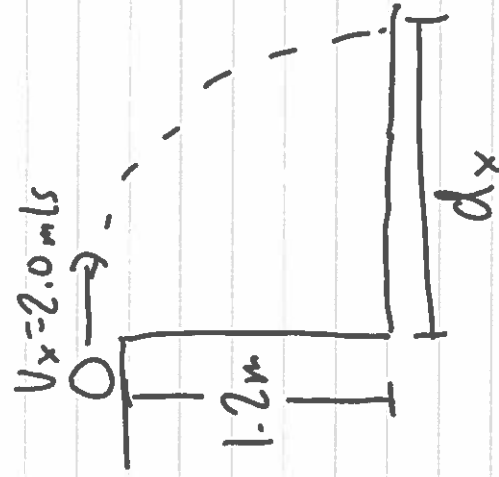

$$v_x = \frac{d_x}{t}$$

$$d_x = v_x \cdot t$$

$$= (2.0 \text{ m/s})(0.495 \text{ s})$$

$$= \boxed{0.99 \text{ m}}$$

$$d = v_0 t + \frac{1}{2} a t^2$$


$$d = \frac{1}{2} a t^2$$

$$t = \sqrt{\frac{2d}{a}}$$

$$= \sqrt{\frac{2(-1.2)}{-9.80}}$$

$$= \underline{0.495 \text{ s}}$$

6.)

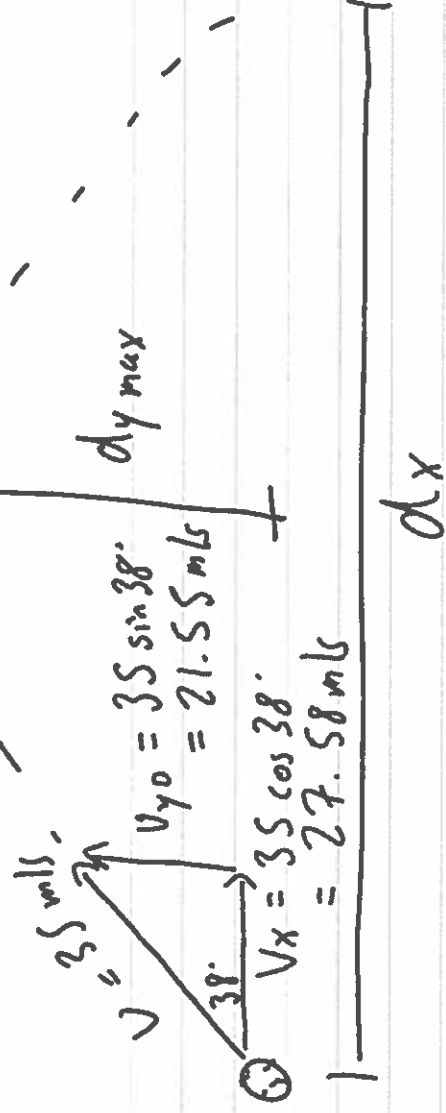

$x$   $y @ t_{\frac{1}{2}}$

$$V_x = 27.58$$

$$dx = ?$$

$$t = 4.40 \text{ s} \leftarrow$$

$$a.) \quad V_x = \frac{dx}{t}$$

$$dx = V_x \cdot t$$

$$= (27.58)(4.40)$$

$$= \boxed{120 \text{ m}}$$

$$V_y = 0$$

$$V_{y0} = 21.55 \text{ m/s}$$

$$a_y = -9.80 \text{ m/s}^2$$

$$d_y =$$

$$t_{\frac{1}{2}} =$$

$$V = V_0 + a t_{\frac{1}{2}}$$

$$t_{\frac{1}{2}} = \frac{V - V_0}{a}$$

$$= \frac{0 - 21.55}{-9.80}$$

$$= 2.20 \text{ s}$$


$$t_{\text{total}} = 2(t_{\frac{1}{2}}) = \underline{4.40 \text{ s}}$$

$$b.) \quad V^2 = V_0^2 + 2ad$$

$$d = \frac{V^2 - V_0^2}{2a} = \frac{- (21.55)^2}{2(-9.80)}$$

$$= \boxed{24 \text{ m}}$$

7.)

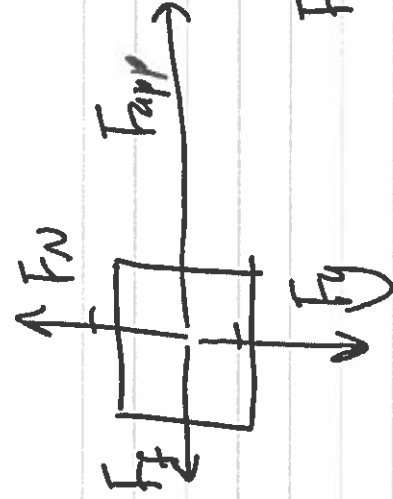

$$F_{net} = F_{app} - F_f = ma$$

$$F_f = F_{app} - ma$$

$$= 9600\text{ N} - (1100\text{ kg})(8.0\text{ m/s}^2)$$

$$= \boxed{800\text{ N}}$$

8)



$$F_{net} = \boxed{F_{app} - F_g = ma}$$


$$F_{app} = F_g + ma$$

$$= mg + ma$$

$$= (5.0 \text{ kg})(9.80 \text{ m/s}^2) + (5.0 \text{ kg})(15 \text{ m/s}^2)$$

$$= \boxed{124 \text{ N}}$$



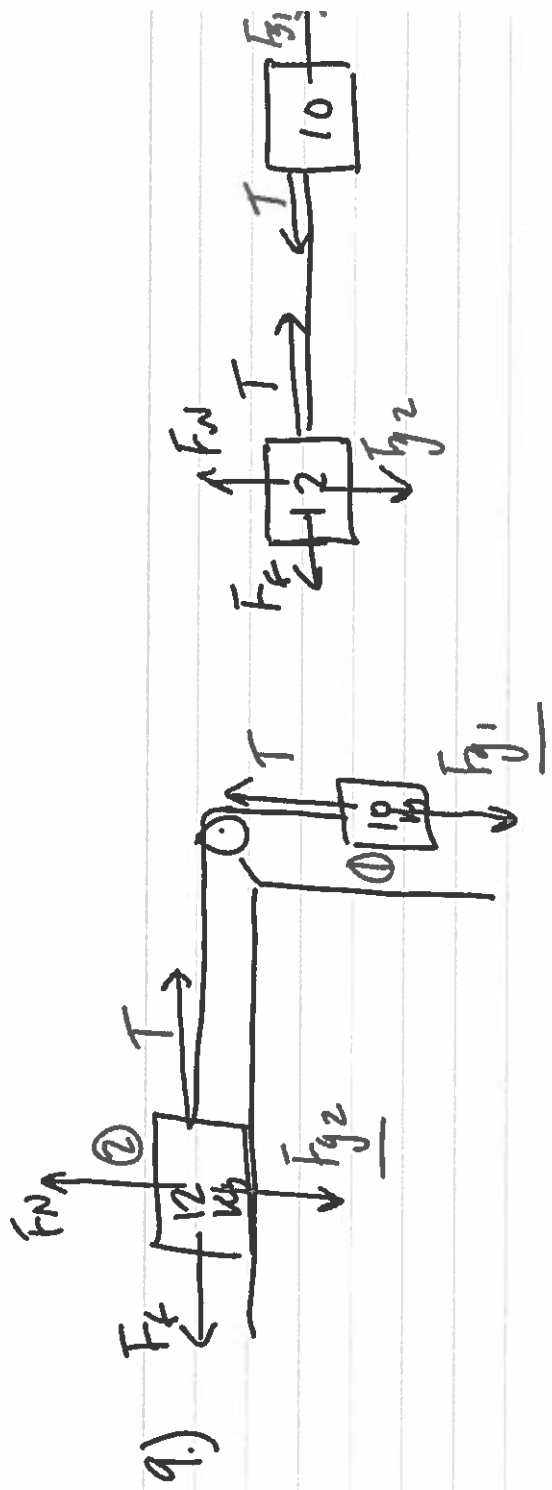


$$\begin{aligned} \text{a) } F_{\text{net}} &= F_{g1} + T - F_f \\ &= F_{g1} - F_f = m_1 a \end{aligned}$$

$$a = \frac{F_{g1} - F_f}{m_1}$$

$$F_{g1} = m_1 g = 98 \text{ N}$$

$$= \frac{98 \text{ N} - 45 \text{ N}}{(10 + 12)}$$


$$= \underline{2.41 \text{ m/s}^2 \text{ right}}$$

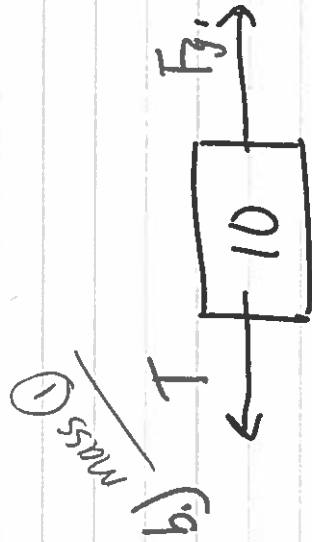

$$F_{\text{net}} = F_{g1} - T = m_1 a$$

$$\begin{aligned} T &= F_{g1} - m_1 a = 98 \text{ N} - (10)(2.4) \\ &= \boxed{73.9 \text{ N}} \end{aligned}$$

10.)

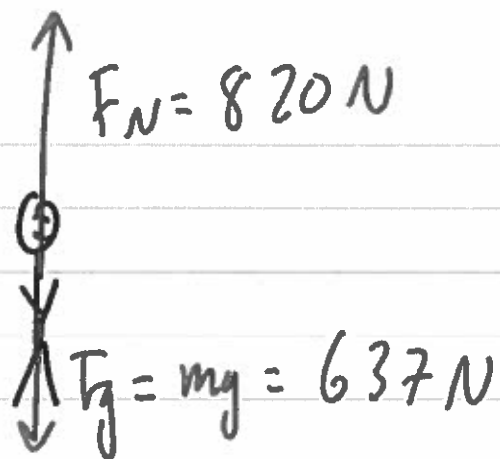


$$F_{\text{net}} = F_N - F_g = ma$$

$$a = \frac{F_N - F_g}{m}$$

$$= \frac{820 - 637}{65}$$

$$= 2.81\text{ m/s}^2$$

11.)

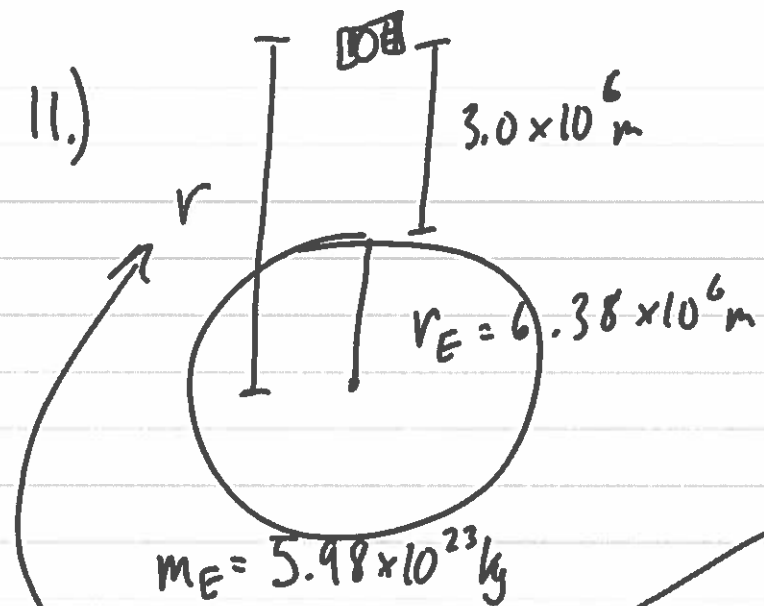

$$F_g = \frac{G M m}{r^2}$$

$$= \frac{(6.67 \times 10^{-11})(5.98 \times 10^{23})(3500)}{(6.38 \times 10^6 + 3.00 \times 10^6)^2}$$

$$= \boxed{1590 \text{ N}}$$

↑  
don't  
forget  
this!

12.)


$$g = \frac{GM}{r^2} = \frac{(6.67 \times 10^{-11})(8.00 \times 10^{24})}{(7.1 \times 10^6)^2}$$

$$= 10.6 \frac{\text{N}}{\text{kg}} \text{ or } \text{m/s}^2$$

Remember:

Gravitational Field Strength  $\equiv$  Acceleration Due to Gravity

13.)

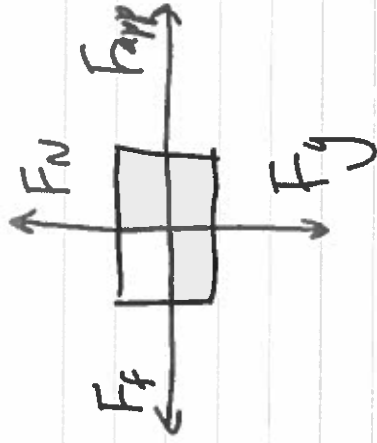

const  $v \therefore a = 0$

$$F_{app} = F_f \quad F_N = F_g = mg \\ = 750N \quad = (1200)(9.80)$$

$$F_f = \mu F_N = 11760N$$

$$\mu = \frac{F_f}{F_N} = \frac{750N}{11760N} = \boxed{0.064}$$

14.)

$$p = mv = (90.0 \text{ kg})(12.0 \text{ m/s})$$
$$= 1080 \text{ kg m/s}$$

15.)

$$V_i = 24 \text{ m/s}$$



$$m = 0.100 \text{ kg}$$



$$V_f = -30 \text{ m/s}$$

don't forget!

$$\begin{aligned} \text{a.) } \Delta p &= m \Delta v = m(v_f - v_i) = (0.100 \text{ kg})(-30 \text{ m/s} - 20 \text{ m/s}) \\ &= \underline{-5.0 \text{ kg m/s}} \text{ or } \underline{5.0 \text{ kg m/s}} \text{ backwards} \end{aligned}$$

b.) Impulses must be equal and opposite

$$\therefore \Delta p_{\text{ragout}} = -\Delta p_{\text{ball}} = \underline{5.0 \text{ kg m/s}}$$

$$\text{c.) } \Delta p = F_{\text{net}} t \quad F_{\text{net}} = \frac{\Delta p}{t} = \frac{5.0 \text{ kg m/s}}{0.010 \text{ s}} = \boxed{100 \text{ N}}$$

16.)

Before

After



$$m_1 = 95 \text{ kg}$$

$$m_2 = 115 \text{ kg}$$

$$m_+ = 210 \text{ kg}$$

$$v_{1i} = 12.0 \text{ m/s}$$

$$v_{2i} = -9.0 \text{ m/s}$$

$$v_f =$$

AHA!

$$m_1 v_{1i} + m_2 v_{2i} = m_+ v_f$$

$$v_f = \frac{m_1 v_{1i} + m_2 v_{2i}}{m_+} = \frac{(95)(12.0) + (115)(-9.0 \text{ m/s})}{210}$$

$$= 0.50 \text{ m/s East}$$

answer is positive so



17.)

Before



$$m_1 = 2.5 \text{ kg}$$



$$m_2 = 5.0 \text{ kg}$$

$$v_{1i} = 3.0 \text{ m/s}$$

$$v_{2i} = 0$$

0

$$m_1 v_{1i} + m_2 v_{2i} = m_1 v_{1f} + m_2 v_{2f}$$

$$m_1 v_{1i} = m_1 v_{1f} + m_2 v_{2f}$$

After



$$m_1 = 2.5 \text{ kg}$$




$$m_2 = 5.0 \text{ kg}$$

$$v_{1f} = -1.0 \text{ m/s}$$

$$v_{2f} = ?$$

ACHTUNG!

$$v_{2f} = \frac{m_1 v_{1i} - m_1 v_{1f}}{m_2} = \frac{(2.5)(3.0) - (2.5)(-1.0)}{5.0}$$
$$= \boxed{2.0 \text{ m/s}}$$

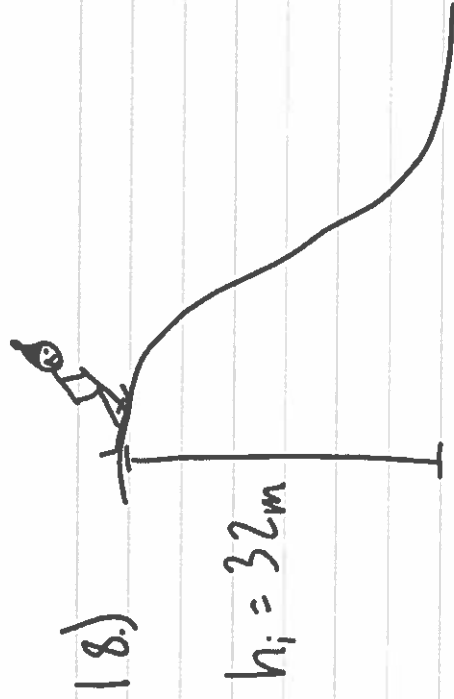

$$a.) E_{ki} + E_{pi} = E_{kf} + E_{pf}$$

$$E_{pi} = E_{kf}$$

$$E_{kf} = mgh_i = (55)(9.80)(32) \\ = 17200\text{J}$$

$$b.) E_k = \frac{1}{2}mv^2$$


$$v = \sqrt{\frac{2E_k}{m}} = \sqrt{\frac{2(17200)}{55}} = \boxed{25 \text{ m/s}}$$

$$c.) E_{kf} = E_{pi}$$

$$\frac{1}{2}mv_f^2 = mgh_i$$

$$v_f = \sqrt{2gh_i} = \boxed{25 \text{ m/s}} \quad \text{Yowza!}$$

19.)

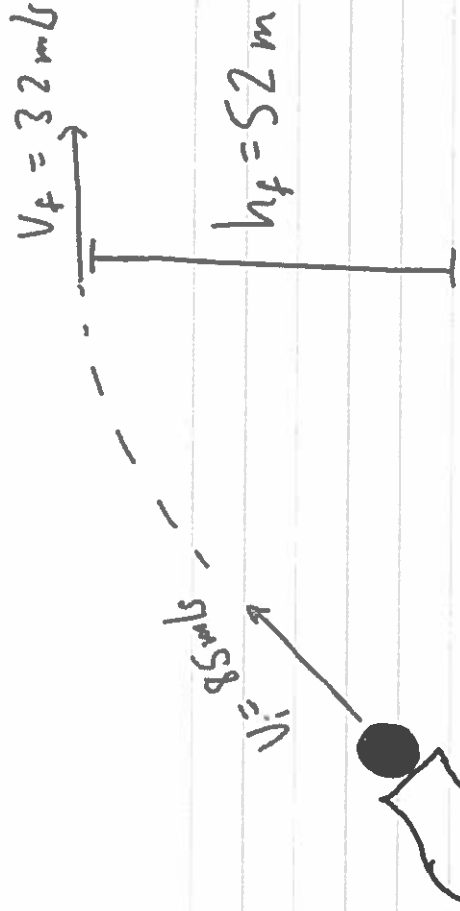

Note:  
This is not a  
projectile problem  
because we are  
generating heat  
due to air  
friction!

a.)  $E_{ki} + E_{pi} = E_{kf} + E_{pf} + E_H$

$$E_H = E_{ki} - E_{kf} - E_{pf}$$

$$= \frac{1}{2}mv_i^2 - \frac{1}{2}mv_f^2 - mgh_f$$

$$= \frac{1}{2}(9.0)(85)^2 - \frac{1}{2}(9.0)(32)^2 - (9.0)(9.80)(52)$$
$$= \boxed{23300 \text{ J}}$$

b.)  $E_H = mc\Delta T$

$$\Delta T = \frac{E_H}{mc} = \frac{23300}{(9.0)(130)} = 20.^\circ\text{C}$$

$$\Delta T = T_f - T_i \quad T_f = T_i + \Delta T = \boxed{41.^\circ\text{C}}$$